

# LITHIUM PRIMARY BATTERY

## SW-D03




### Key Characteristics

- High and stable operating voltage
- Low self-discharge rate (less than 2% after 1 year of storage at + 20°C)
- Superior pulse capability
- Spiral type (with safety vent)
- Finished with 4A fuse
- Non-flammable inorganic electrolyte
- Hermetic glass-to-metal sealing
- UL recognized (file number MH18384)
- RoHS Compliance



### External Dimensions

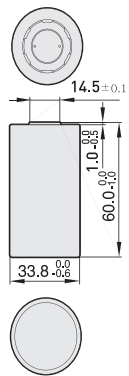


※ Available Terminals :  
FF ST Other type available by request

### Specifications

Model	SW-D03
Nominal voltage	3.6V
Nominal capacity (at 20mA, 20°C, 2.0V cut off)	14.0Ah
Maximum recommended continuous current (Higher currents are possible, consult Vitzrocell)	1,800mA
Max. pulse discharge current	3,000mA
Weight	102.0g
Operating temperature range	-55 ~ 85 °C

※ Max. pulse current/0.1 second pulses, drained every 2 min at + 20 °C from undischarged cells with 10μA base current, yield voltage readings above 3.0V. The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history.  
Fitting the cell with a capacitor may be recommended in severe conditions. Consult Vitzrocell.

### Characteristic Curve

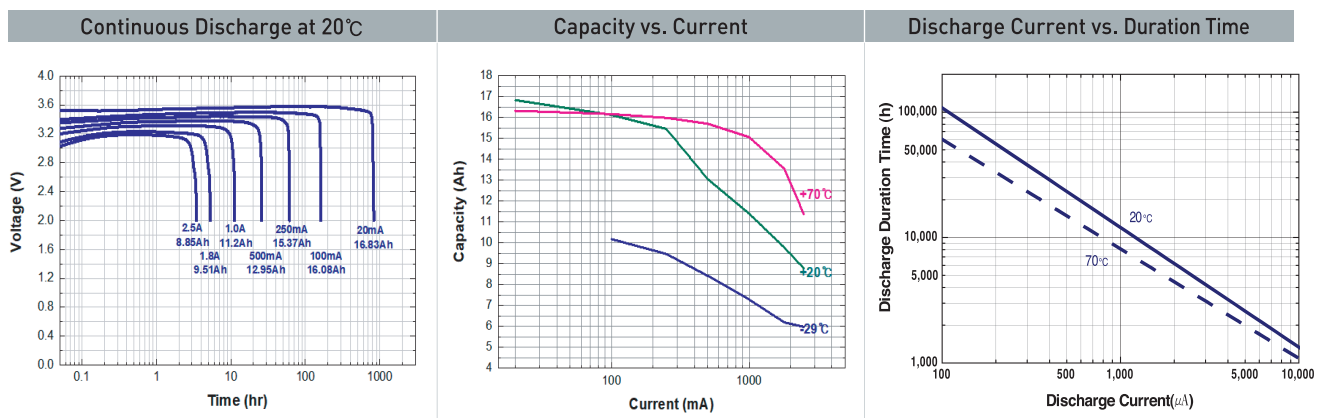

※ This data was made on basis of nominal capacity for the purpose of enabling users to forecast approximate life time.  
In order to calculate precise life time under various environments, we recommend you to consult Vitzrocell.

### Warning

Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 212°F(100°C), incinerate, short circuit or expose contents to water. Keep battery out of reach of children and in original package until ready to use. Dispose of used batteries promptly.

※ Any information given here is for reference only. Information is also dependent on actual conditions of use and does not guarantee future performance, and subject to change.

# LITHIUM PRIMARY BATTERY

## SW-D04




### Key Characteristics

- High and stable operating voltage
- Low self-discharge rate (less than 2% after 1 year of storage at +20°C)
- Superior pulse capability
- Spiral type (with safety vent)
- Finished with 4A fuse
- Non-flammable inorganic electrolyte
- Hermetic glass-to-metal sealing
- UL recognized (file number MH18384)
- RoHS Compliance



### External Dimensions

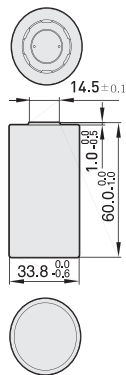


※ Available Terminals :  
FF ST Other type available by request

### Specifications

Model	SW-D04
Nominal voltage	3.6V
Nominal capacity (at 20mA, 20°C, 2.0V cut off)	14.0Ah
Maximum recommended continuous current (Higher currents are possible, consult Vitzrocell)	1,800mA
Max. pulse discharge current	3,000mA
Weight	102.0g
Operating temperature range	-55 ~ 85°C

※ Max. pulse current/0.1 second pulses, drained every 2 min at +20 °C from undischarged cells with 10μA base current, yield voltage readings above 3.0V. The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history.  
Fitting the cell with a capacitor may be recommended in severe conditions. Consult Vitzrocell.

### Characteristic Curve

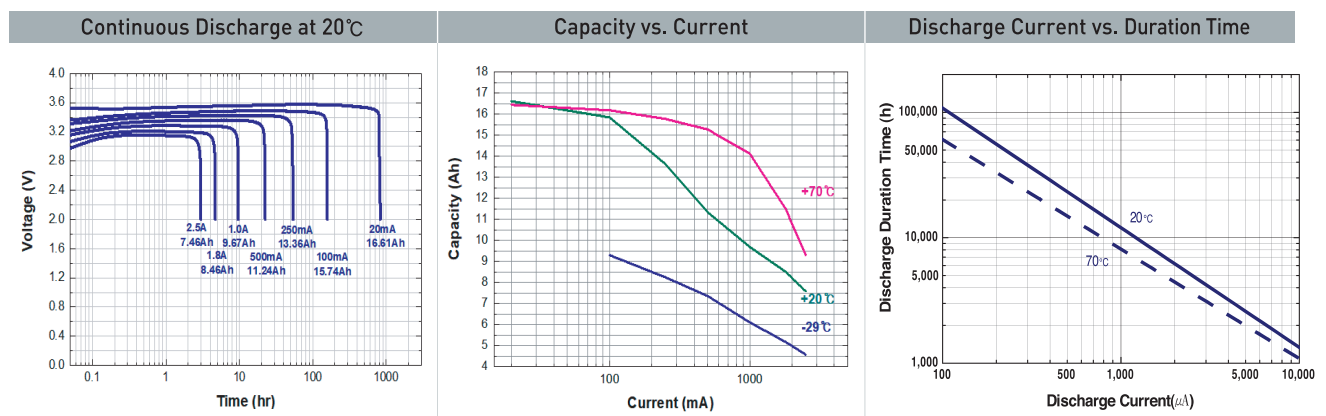

※ This data was made on basis of nominal capacity for the purpose of enabling users to forecast approximate life time.  
In order to calculate precise life time under various environments, we recommend you to consult Vitzrocell.

### Warning

Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 212°F(100°C), incinerate, short circuit or expose contents to water. Keep battery out of reach of children and in original package until ready to use. Dispose of used batteries promptly.

※ Any information given here is for reference only. Information is also dependent on actual conditions of use and does not guarantee future performance, and subject to change.